




S.0403 Rear Black Glass - CL4416

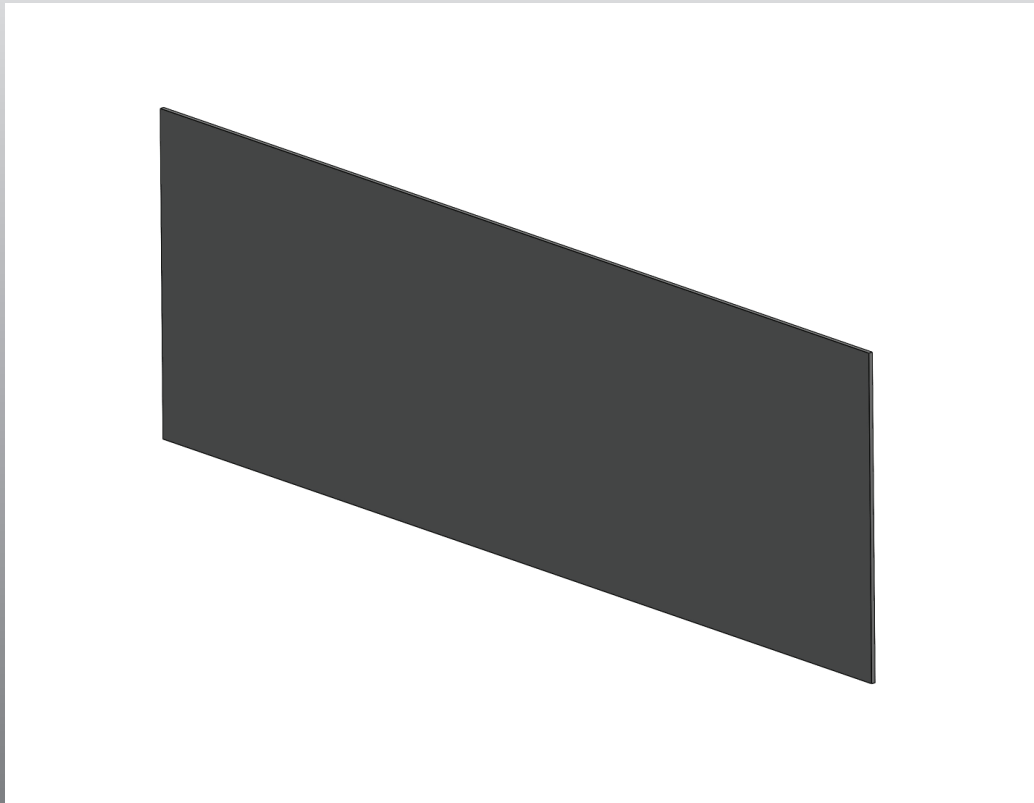

WARNING

ONLY THE GLASS SUPPLIED BY THE MANUFACTURER MAY BE USED WITH THIS APPLIANCE. THE GLASS MUST BE INSTALLED AS DESCRIBED IN THIS MANUAL. IF GLASS IS BROKEN, SEE DEALER FOR OEM REPLACEMENT.



CALIFORNIA PROPOSITION 65

WARNING: This part is to be used in a heating appliance that can expose you to chemicals including benzene, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information:

www.P65Warnings.ca.gov

Manufactured By

Valley Comfort Systems Inc., 1290 Commercial Way, Penticton, BC, V2A 3H5, Canada
Phone: 250-493-7444 ♦ Fax: 250-493-5833 ♦ www.blazeking.com ♦ info@blazeking.com

Pour la version française de nos manuels, vous référez à notre site web: www.blazeking.com

S.0403 REAR GLASS - CL4416

REAR GLASS INSTALLATION

NOTE: Must be installed before side glass.

1. **If applicable;** turn off the appliance and electrical power. Allow the appliance to cool down completely. Remove the safety screen and glass door. (See owners manual for instructions.) Remove any log pieces and set aside, note log positions, refer to log installation manual for clarification.
2. Back off the two screws holding the rear glass clips, slide the clips out of the key hole and set aside. (**Fig. 1**)
3. Handle the rear glass by the edges to prevent smudging, wear clean vinyl gloves if possible. Position the glass into the firebox. Rest the glass on the rear ledge behind the floor glass support brackets. (**Fig. 2 & 3**)
4. Push the panel back against the rear wall of the firebox, centering it left to right. While holding the glass in position re-insert the rear glass clips from **STEP 2**, push them firmly against the glass and tighten the screws. (**Fig. 3**)

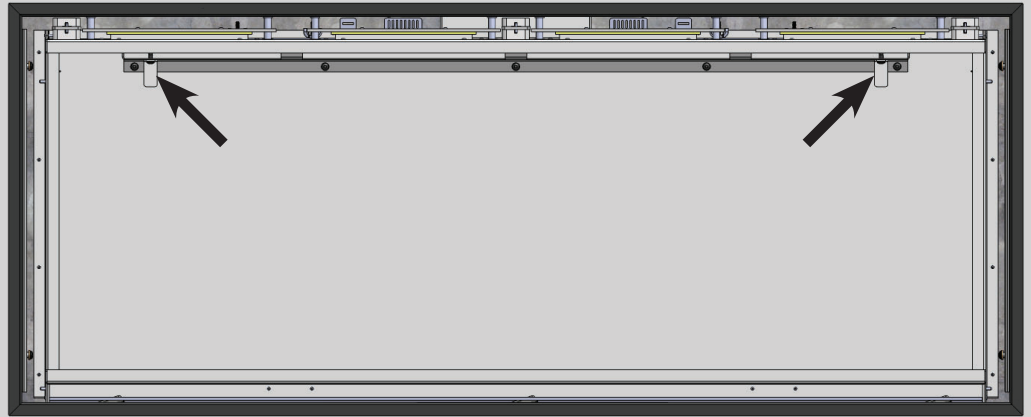


Fig. 1

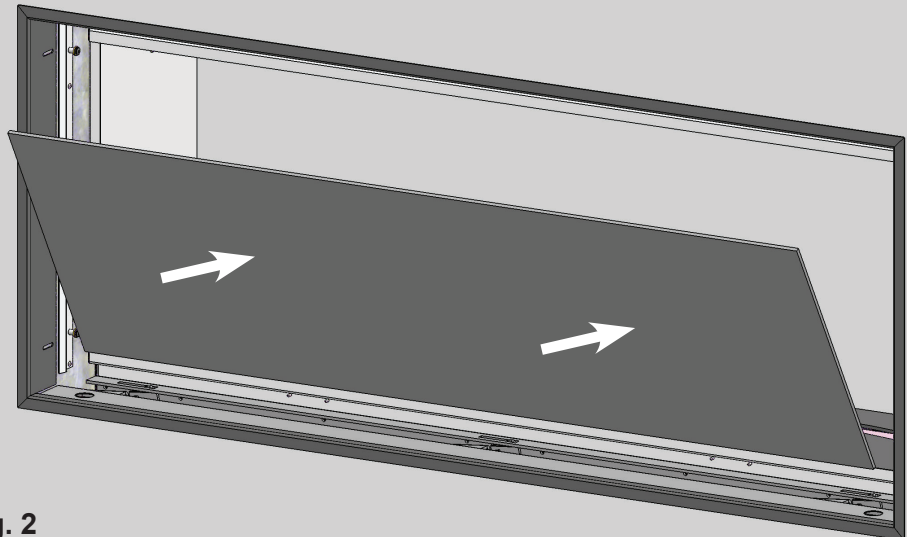


Fig. 2

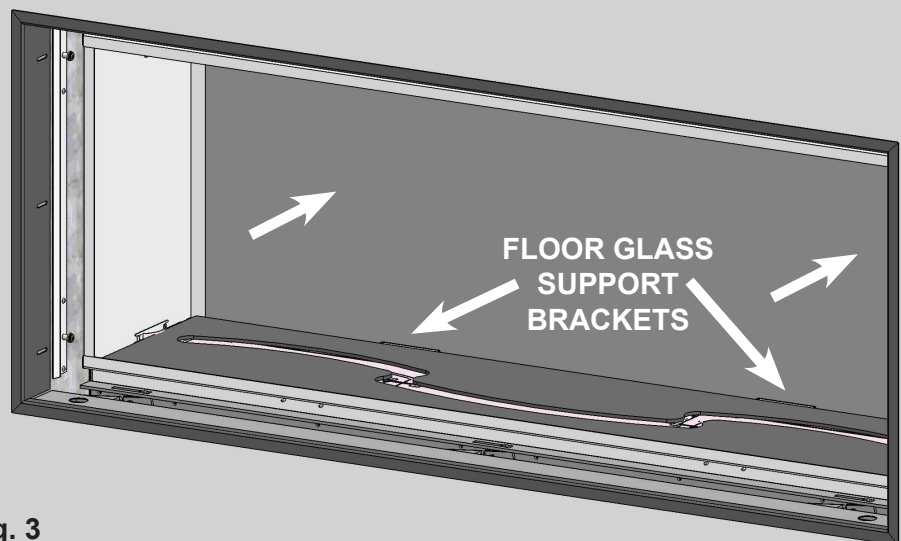


Fig. 3